

D

C

B




A

D


C

B


A

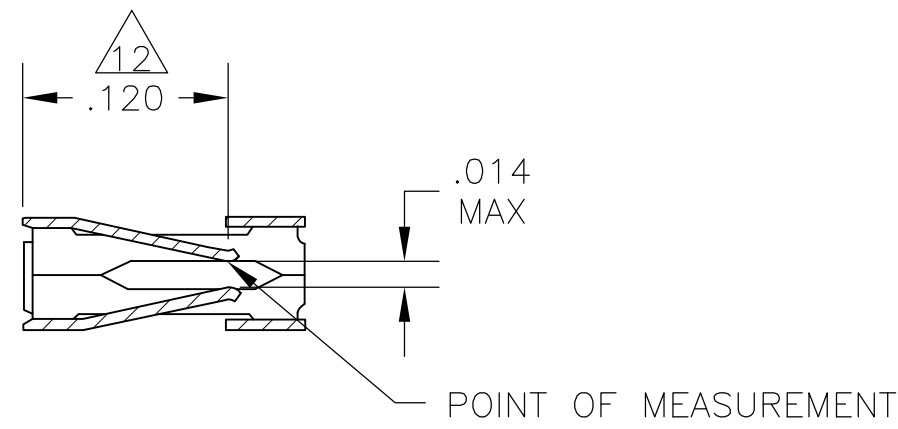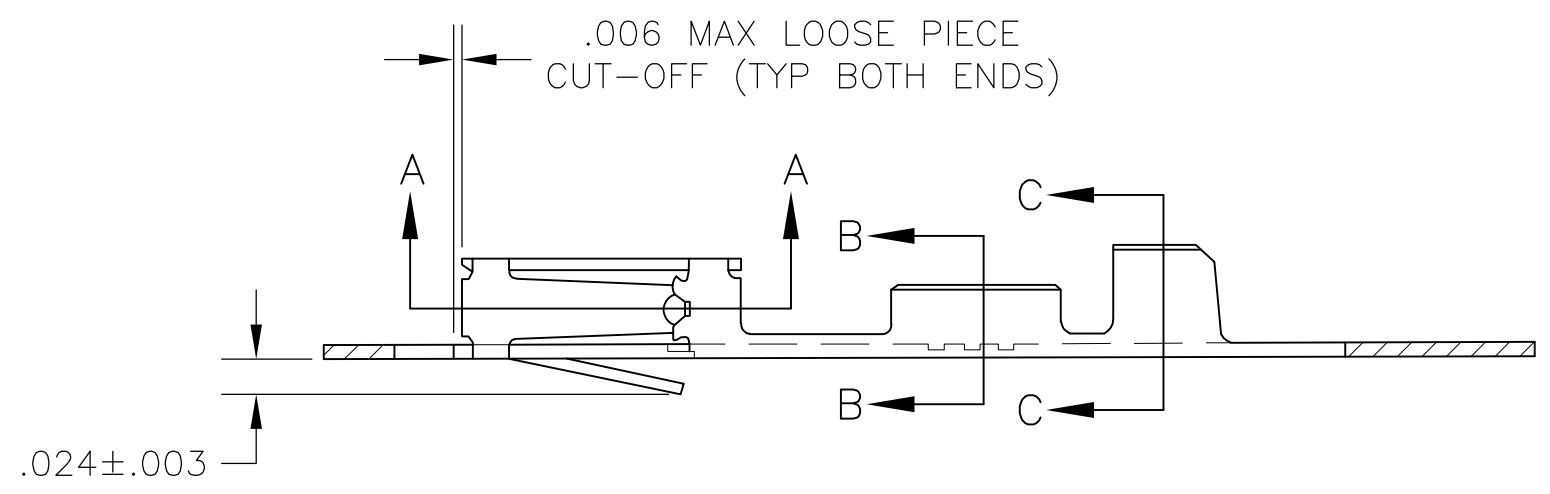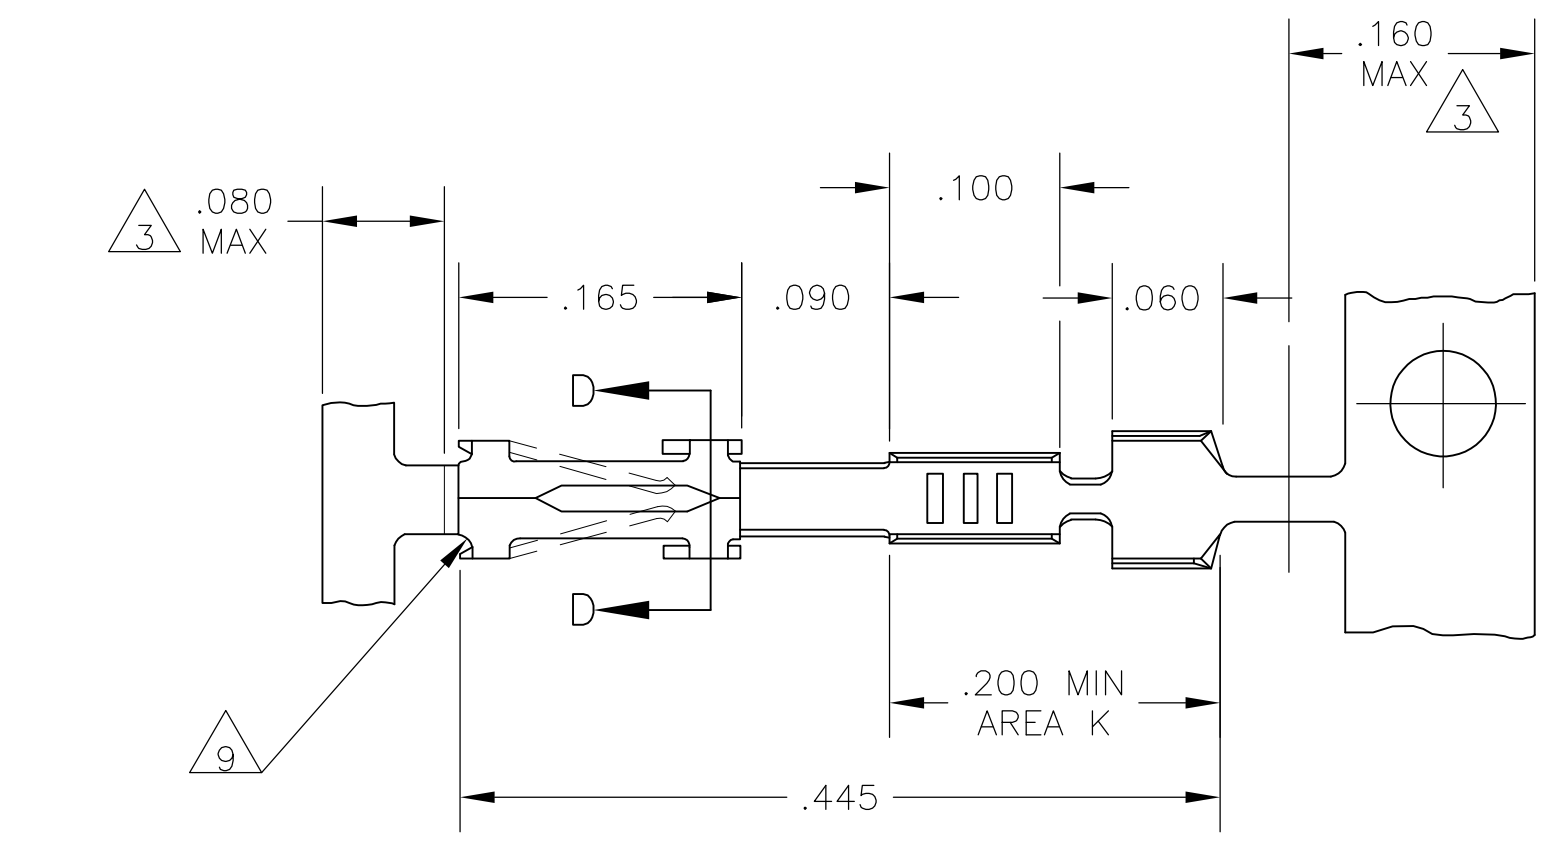


SECTION A-A

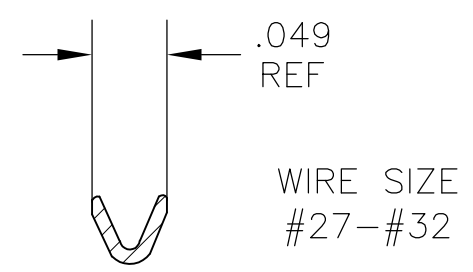

SECTION B-B

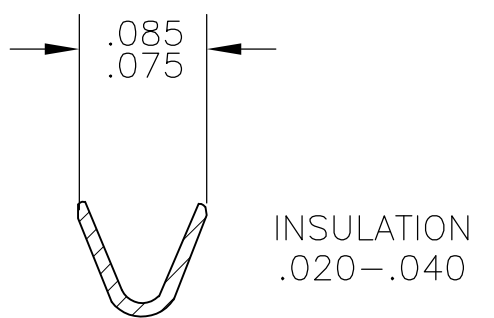

SECTION C-C



SECTION D-D

- 1 UNPLATED
- 2 .000030 GOLD ON CONTACT AREA, GOLD FLASH ON THE REMAINDER, ALL OVER .000050 NICKEL.
- 3 GOLD PLATING NOT REQUIRED THIS AREA.
- 4 .000050 NICKEL ENTIRE CONTACT, .000015 GOLD ON CONTACT AREA.
- 5 SHEARED EDGES PERMITTED TO BE UNPLATED.
- 6 PREPLATED .000050-.000150 BRIGHT TIN.
- 7. REELED FOR MINI APPLICATOR.
- 8 .000015 GOLD ON CONTACT AREA, .000100-.000200 BRIGHT TIN-LEAD ON AREA K, OVER .000050 NICKEL.
- 9 CUT OUTS ON BOX AT MANUFACTURER'S OPTION.
- 10 .000030 GOLD ON CONTACT AREA, .000100-.000200 BRIGHT TIN-LEAD IN AREA K, ALL OVER .000050 NICKEL.
- 12 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 13 OBSOLETE PART NUMBER
- 14 .000015 GOLD ON CONTACT AREA, .000100-.000200 MATTE TIN ON AREA K, OVER .000050 NICKEL.
- 15 .000030 GOLD ON CONTACT AREA, .000100-.000200 MATTE TIN IN AREA K, ALL OVER .000050 NICKEL.

6-102316-4	5 15	5-102316-8
6-102316-3	5 14	5-102316-6
1-102316-4	5 10	102316-8
1-102316-3	5 8	102316-6
1-102316-2	6	102316-5
1-102316-1	4 5	102316-3
1-102316-0	13 2	102316-2
---	1	102316-1
LOOSE PIECE PART NO	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
INCHES	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± 0.13 [.005]
	4 PLC ± -
	ANGLES ± -
	FINISH SEE TABLE

MATERIAL	CU-SN-P ALLOY 521 .008 THK
----------	----------------------------

DWN	15 NOV 78
CHK	14 FEB 79
APVD	20 FEB 79
PRODUCT SPEC	---
APPLICATION SPEC	---
WEIGHT	---
CUSTOMER DRAWING	SCALE 8:1

TE Connectivity	
CONTACT, FEMALE, MOD IV CRIMP SNAP-IN	
SIZE	CAGE CODE
A2	00779
DRAWING NO	102316
RESTRICTED TO	---
SHEET	1 OF 1
REV	R2