

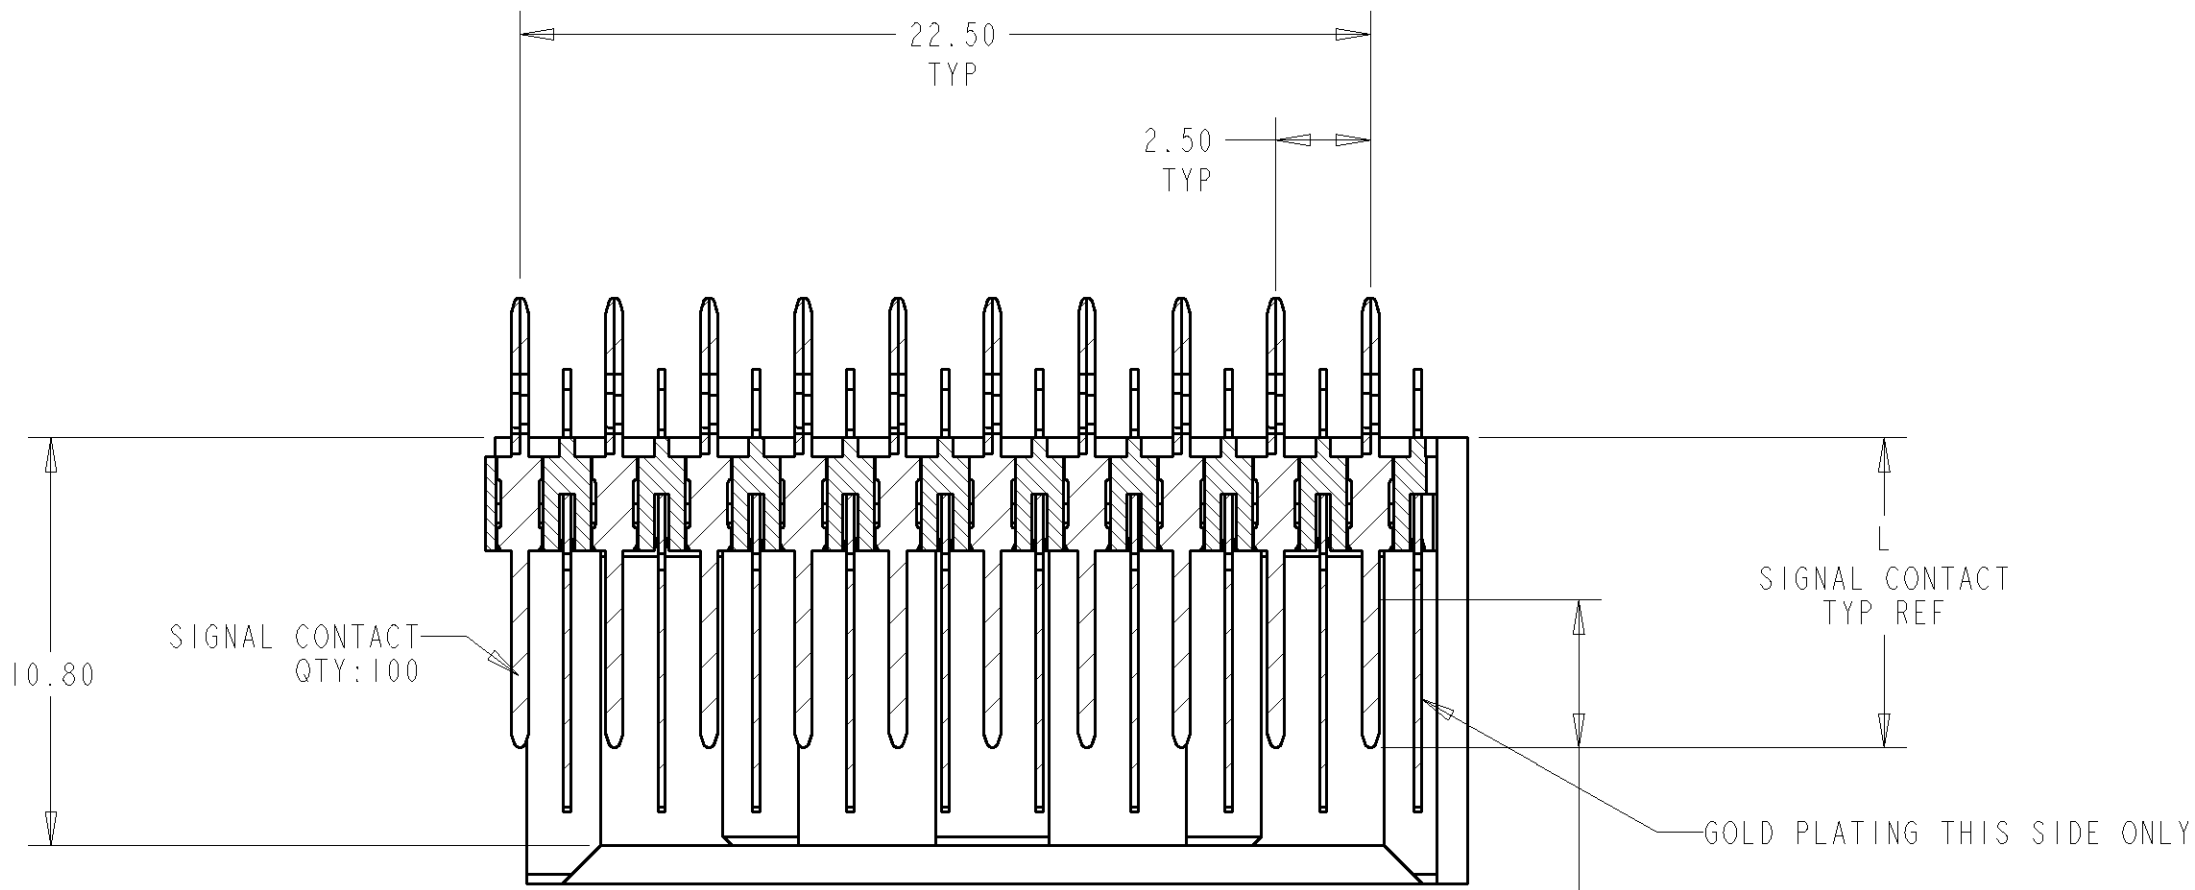
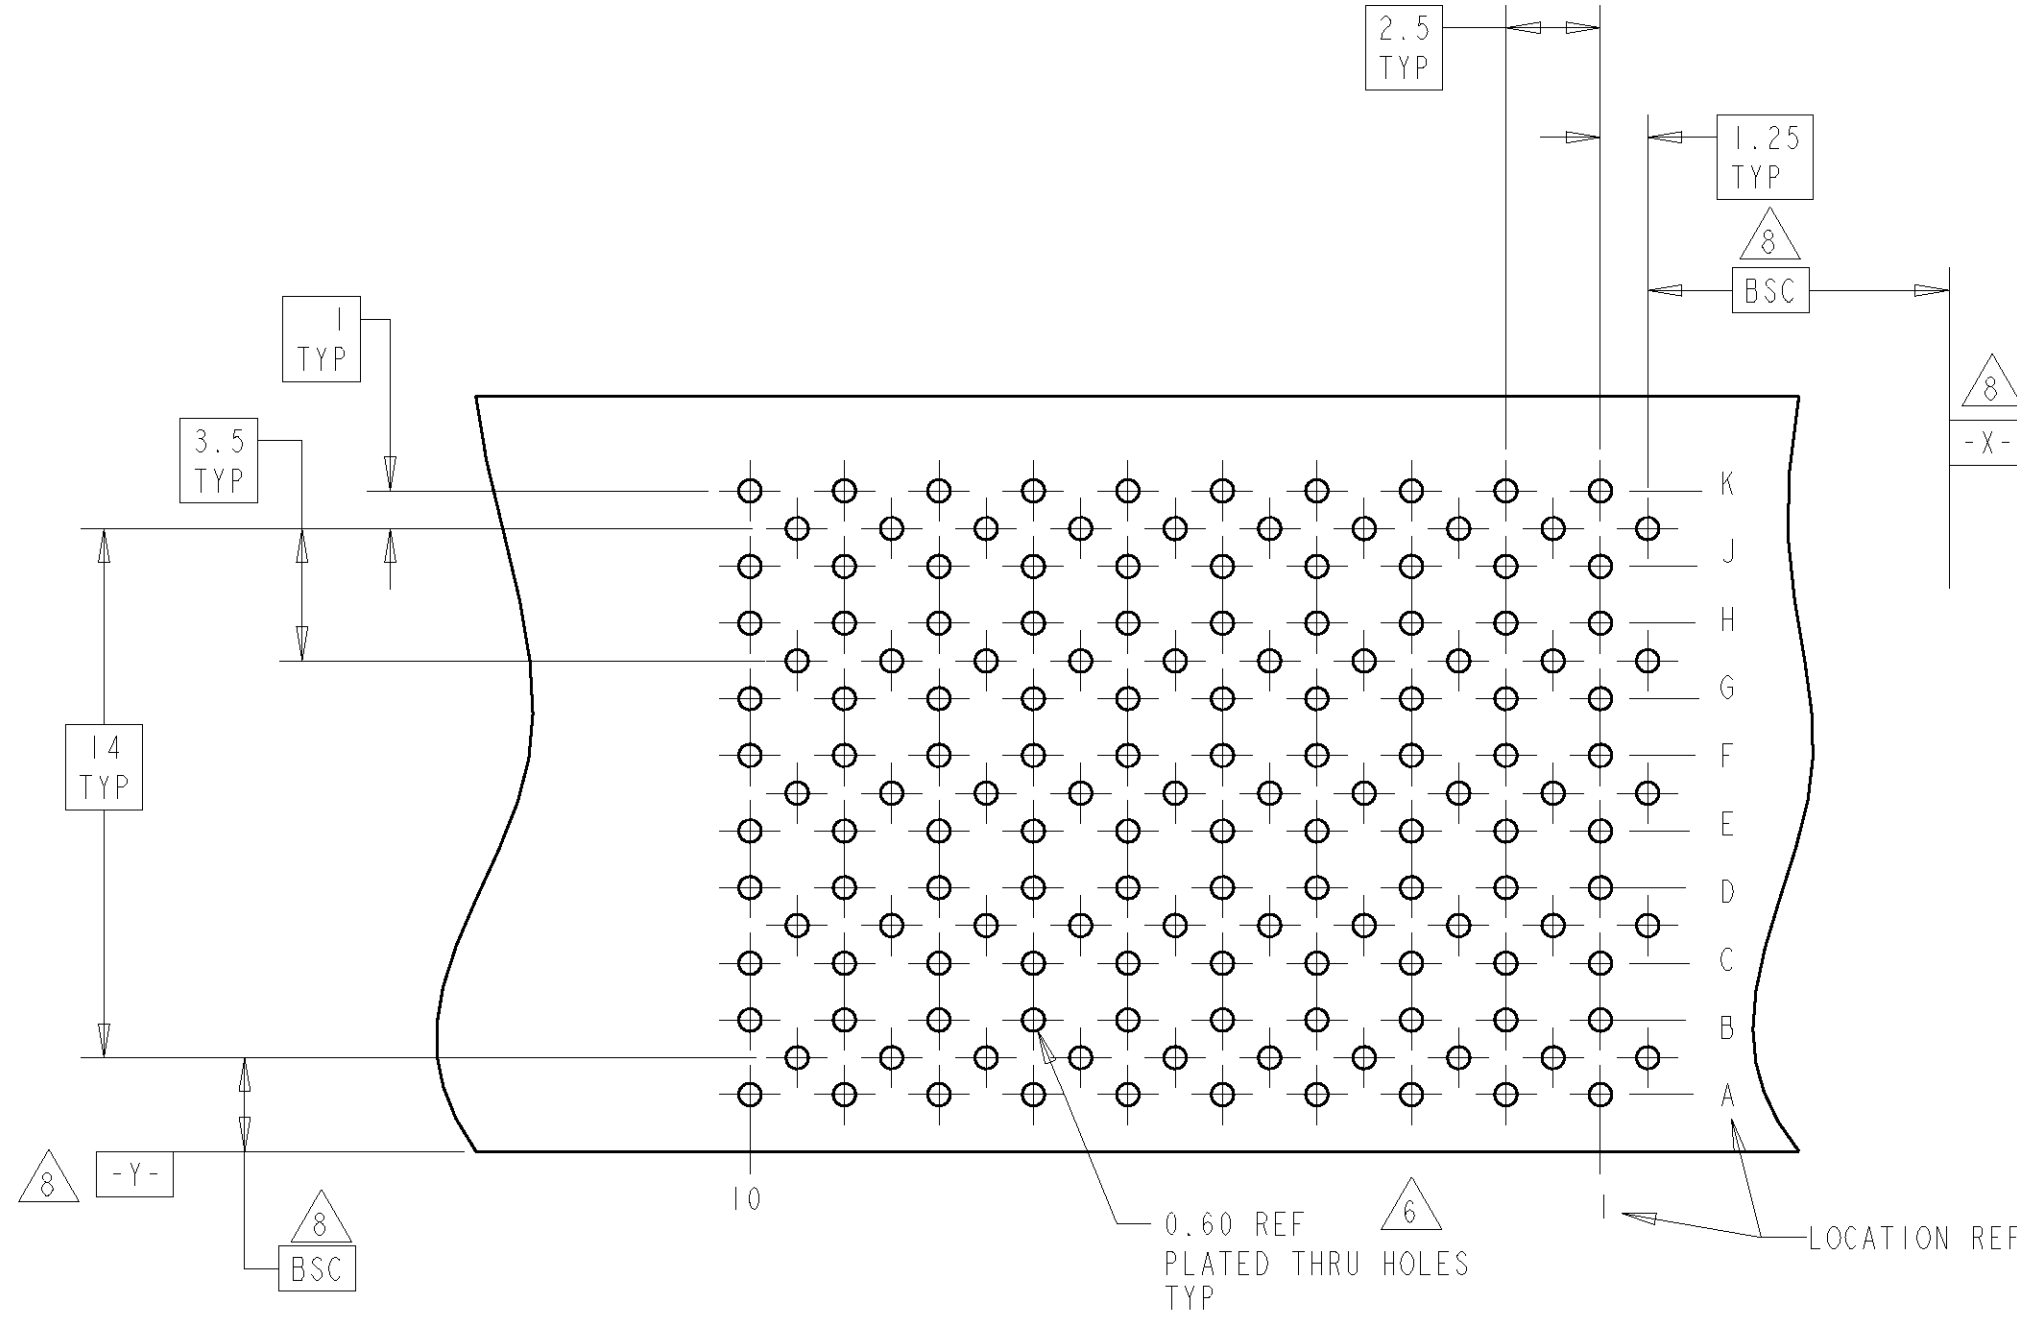


LOC	DIST	REVISIONS					
AD	47	P	LTR	DESCRIPTION	DATE	DWN	APVD
		E		REVISED PER 0512-0157-03	16OCT2003	SJM	RAP
		F		REVISED PER 0512-0411-03	02FEB03	SJM	RAP
		FI		REV PER ECO-06-024579	18JAN2007	JRP	RAP

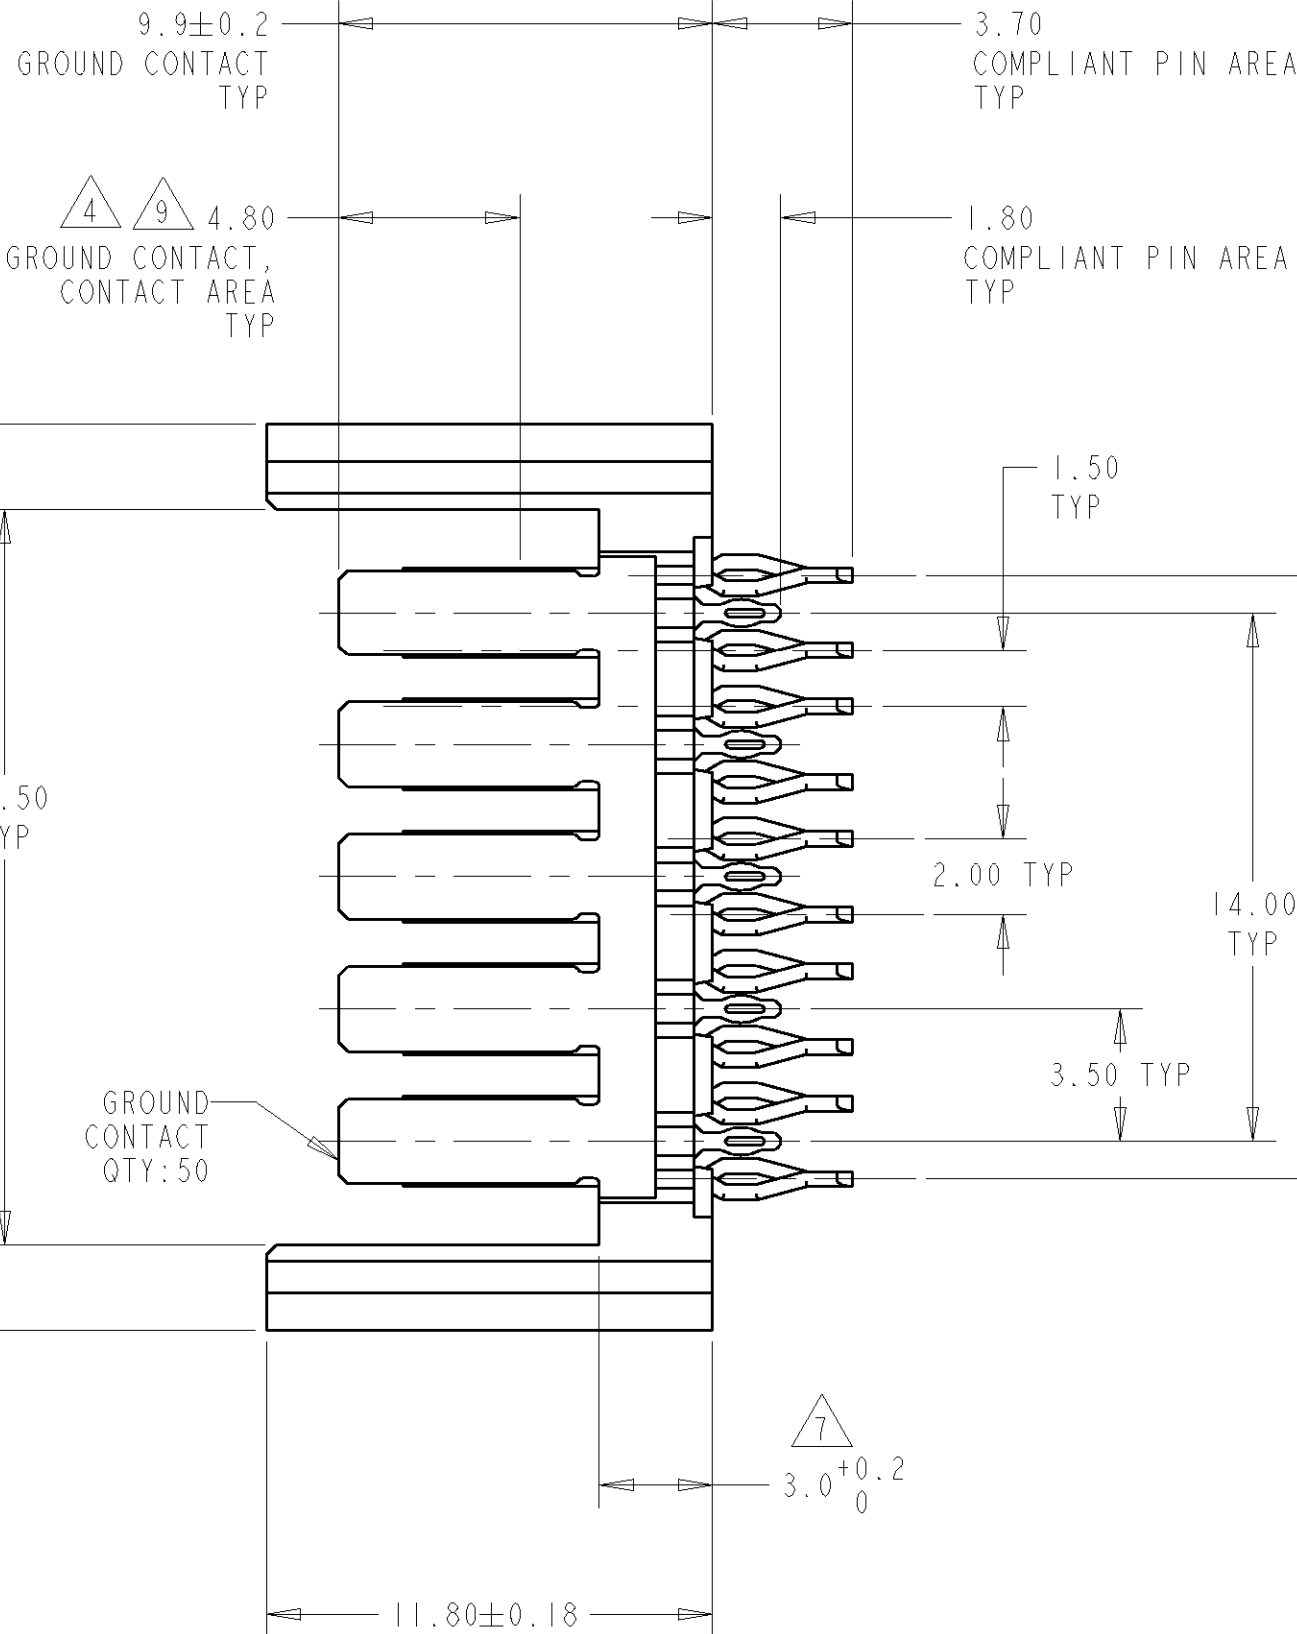


- 2 PHOSPHOR BRONZE
- 3 LCP, UL94V-0
- 4 0.76µm MIN GOLD OVER 1.27µm MIN NICKEL UNDERPLATE OR GOLD FLASH OVER 0.76µm MIN PALLADIUM-NICKEL OVER 1.27µm MIN NICKEL UNDERPLATE ON CONTACT AREA. 0.76µm MIN TIN LEAD OVER 1.27µm MIN NICKEL ON COMPLIANT PIN AREA
- 5 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 6 REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 7 APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- 8 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 9 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

SECTION B-B

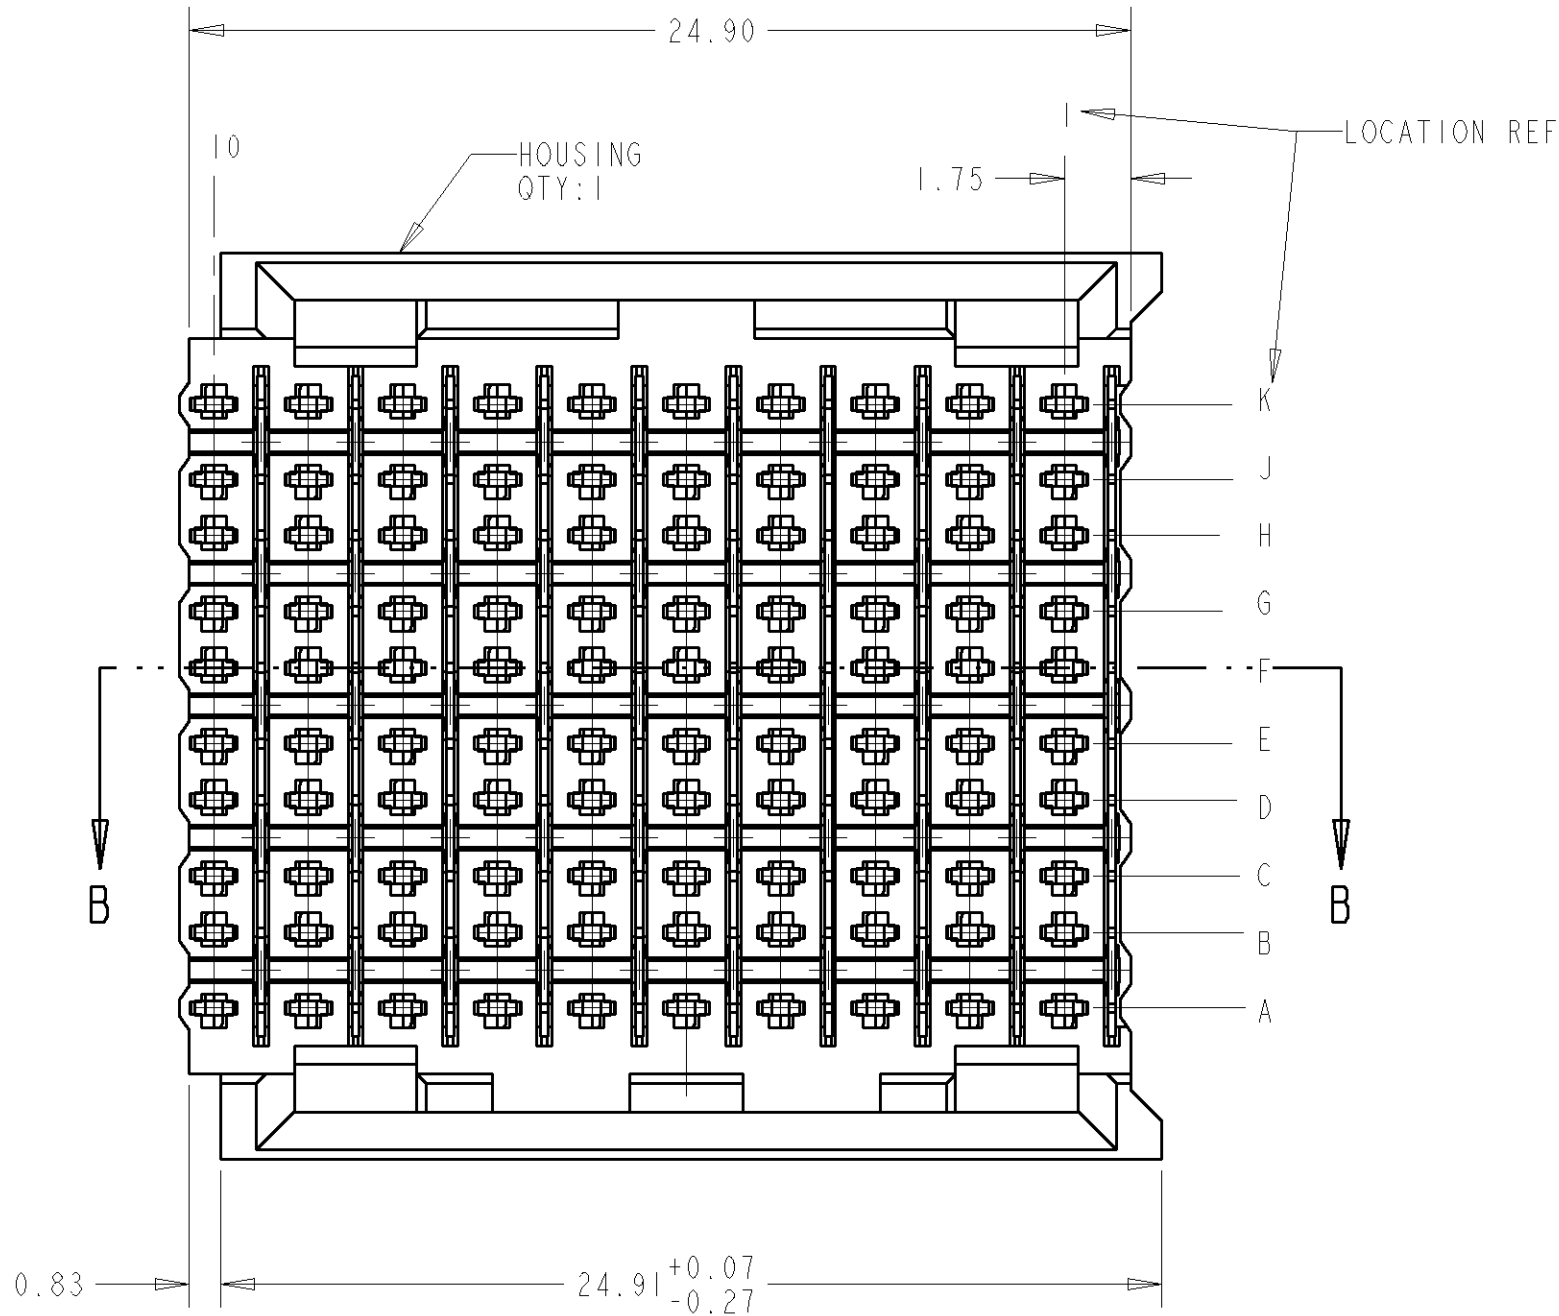

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

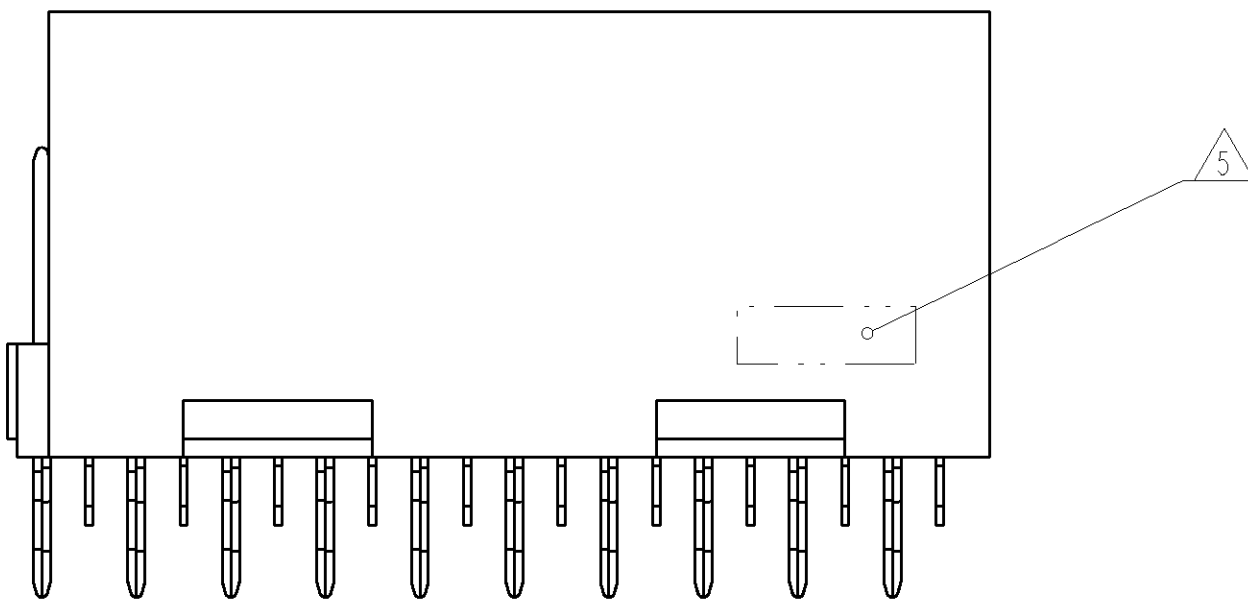

5.30	9.7	120658-2
3.90	8.2	120658-1
M	L	PART NUMBER

THIS DRAWING IS UNPUBLISHED. IT IS LOANED TO YOU BY THE TYCO ELECTRONICS CORPORATION. IT IS TO BE RETURNED TO THE TYCO ELECTRONICS CORPORATION. IT IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS CORPORATION. SHOULD BE CONTACTED FOR THE LATEST EDITION.		DWN H. MOLL 14APR99	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK HW ANDREWS 14APR99	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ±0.05 4 PLC ± ANGLES ± FINISH -		APVD HW ANDREWS 14APR99	PRODUCT SPEC	
MATERIAL HOUSING: 3		APPLICATION SPEC		SIZE
CONTACTS: 2		WEIGHT		CAGE CODE
SIGNAL CONTACT: 4		CUSTOMER DRAWING		DRAWING NO
		A 00779 C=120658		RESTRICTED TO
		SCALE 5:1		SHEET 1 OF 1
				REV F