

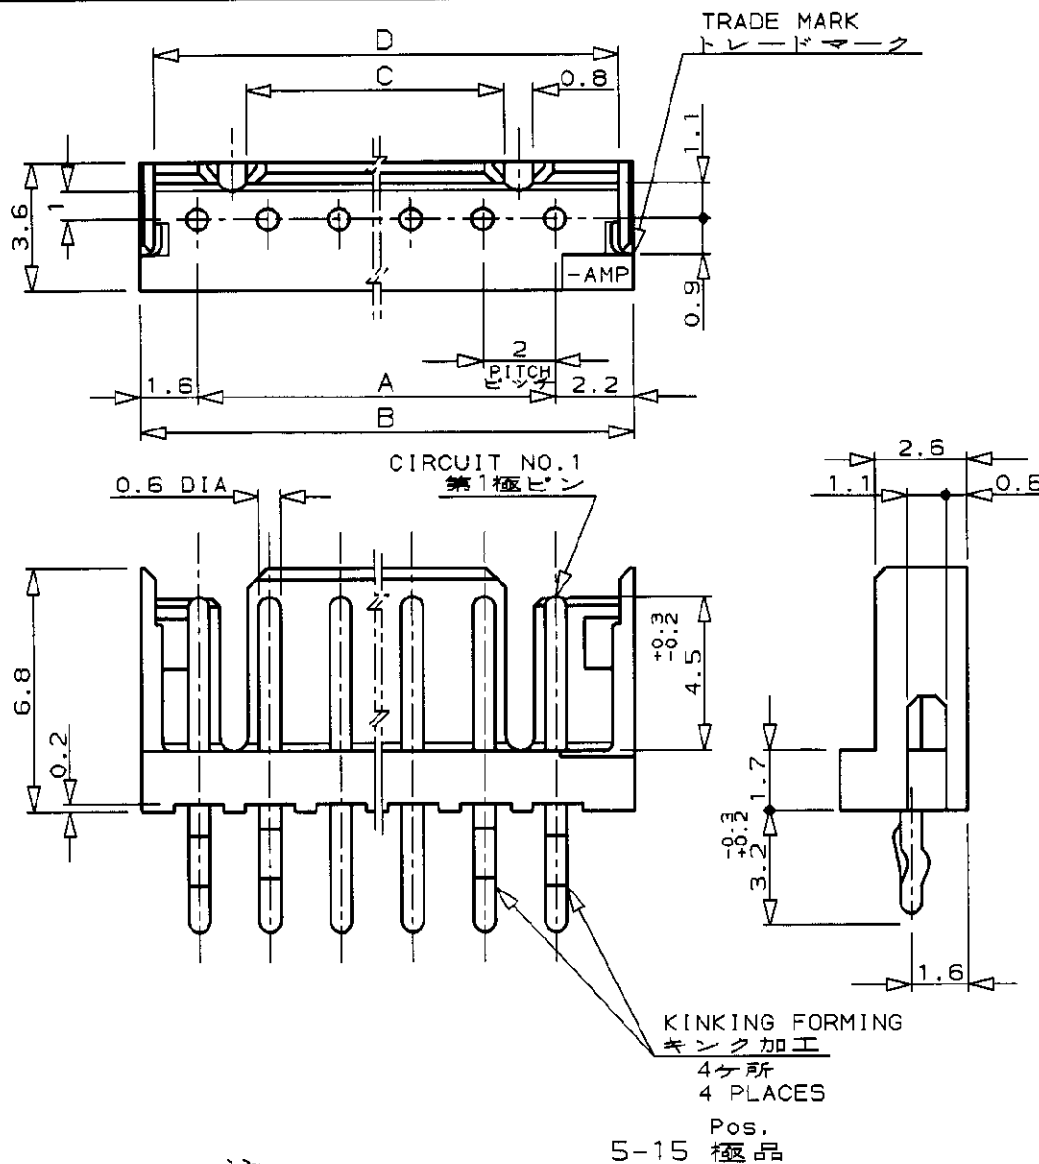
NUMBER C-173981



METRIC

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

PRINT DIST



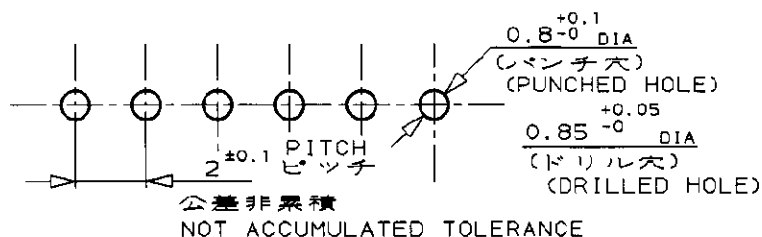
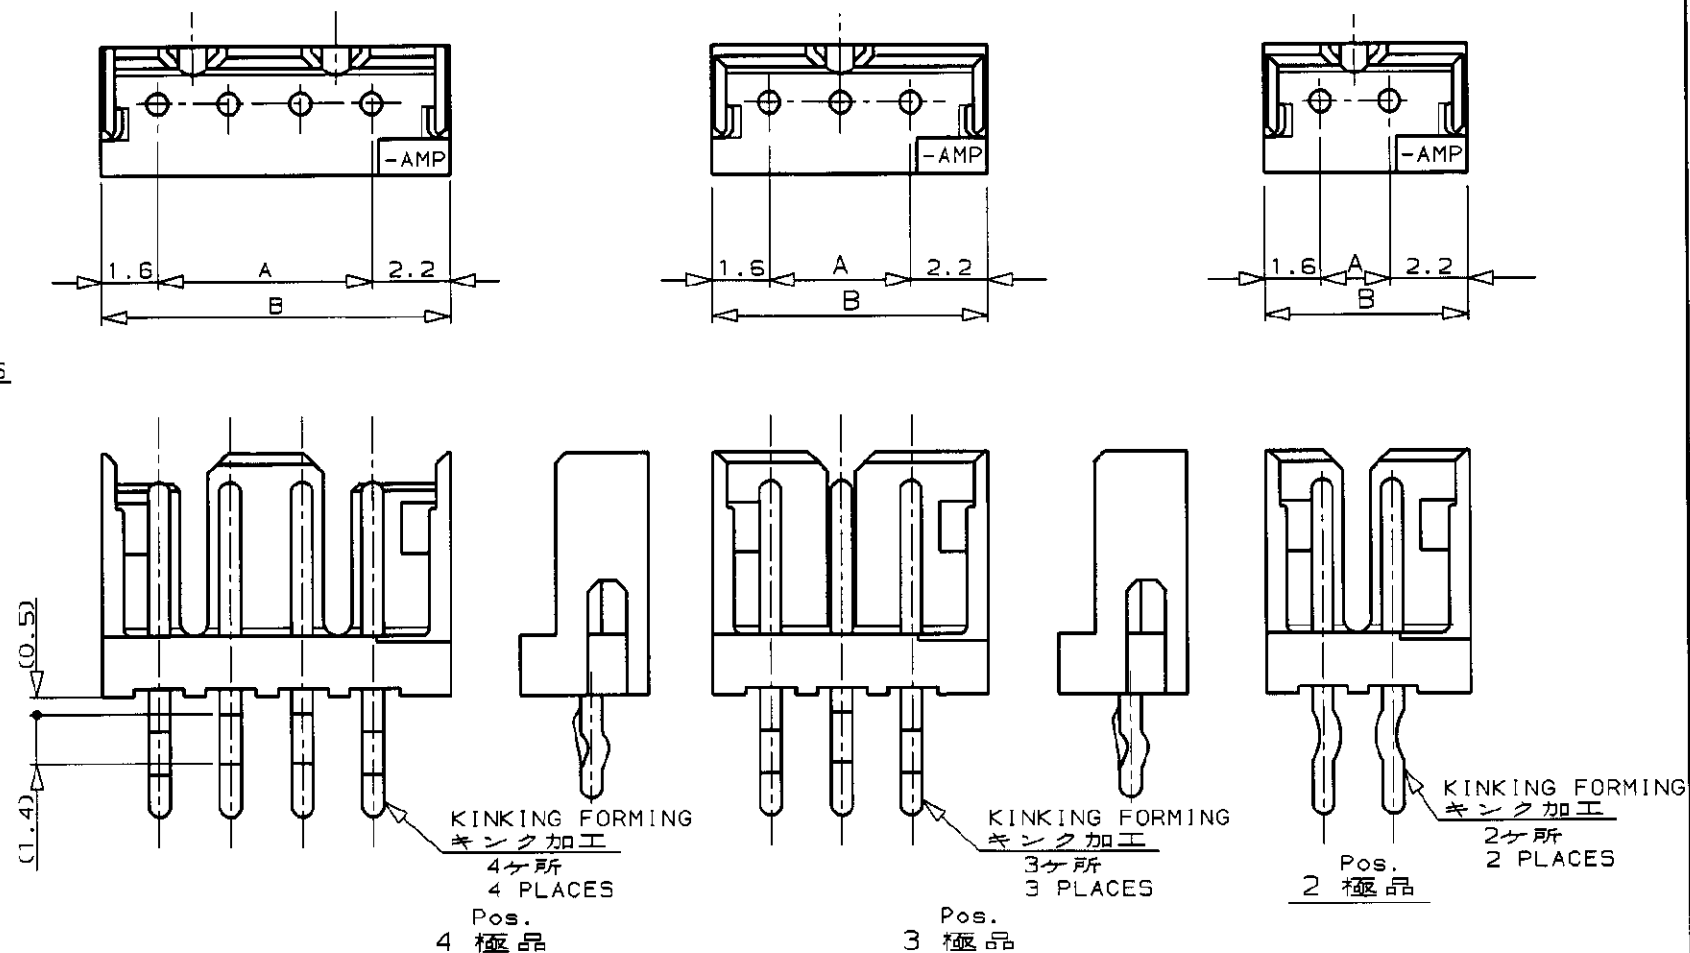
注 ;

- 材料 : HSG - 66ナイロン樹脂UL94V-0
ポスト - 半田メッキ付黄銅
- 適用製品規格 : 108-5218
- 嵌合相手製品型番 : P/N 173977

NOTES;

- MATERIAL: HOUSING - 66 NYLON (UL94V-0)
POST - POST-PLATED TIN-LEAD BRASS
- PRODUCT SPEC., 108-5218
- APPLICABLE RECEPTACLE, P/N 173977

△ SUPERSEDED BY 292161

RECOMMENDABLE P.C. BOARD LAYOUT
推奨基板寸法(板厚 0.8-1.6)
(PCB THK: 0.8-1.6)

	△7-173981-5	△5-173981-5	△3-173981-5	△1-173981-5	15	28	31.8	25.2	31.0
	△7-△ -4	△5-△ -4	△3-△ -4	△1-△ -4	14	26	29.8	23.2	29.0
	△7- -3	△5- -3	△3- -3	△1- -3	13	24	27.8	21.2	27.0
△9-173981-2	△7- -2	△5- -2	△3- -2	△1- -2	12	22	25.8	19.2	25.0
△9-△ -1	△7- -1	△5- -1	△3- -1	△1- -1	11	20	23.8	17.2	23.0
△9- -0	△7- -0	△5- -0	△3- -0	△1- -0	10	18	21.8	15.2	21.0
△8- -9	△6- -9	△4- -9	△2- -9		9	16	19.8	13.2	19.0
△8- -8	△6- -8	△4- -8	△2- -8	△	8	14	17.8	11.2	17.0
△8- -7	△6- -7	△4- -7	△2- -7	△	7	12	15.8	9.2	15.0
△8- -6	△6- -6	△4- -6	△2- -6	△	6	10	13.8	7.2	13.0
△8- -5	△6- -5	△4- -5	△2- -5	△	5	8	11.8	5.2	11.0
△8- -4	△6- -4	△4- -4	△2- -4		4	6	9.8	3.2	9.0
△8-△ -3	△6-△ -3	△4-△ -3	△2-△ -3	△△ -3	3	4	7.8	—	7.0
△8-173981-2	△6-173981-2	△4-173981-2	△2-173981-2	△173981-2	2	2	5.8	—	5.0
RED 赤色	BLACK 黒色	YELLOW 黄色	BLUE 青色	NATURAL 自然色	Pos. 極数	A	B	C	D

WIRE RANGE — # — mm ² (AWG -)	INSULATION DIA — # — mmφ	NAME ポストヘッダーアッセンブリ・垂直型 (V-タイプ) POST HEADER ASS'Y VERTICAL TYPE (AMP CT CONNECTOR 2mm PITCH)
MATERIAL SEE NOTE 1 注1参照	FINISH — # —	GENERAL TOLERANCE 0<≦10 : ±0.2 10<≦30 : ±0.25 30<≦100 : ±0.3 ANGLES : ±3°
DR. T. NAKAMURA 4/5/90	DE. T. NAKAMURA 10/27/95	SIZE B J
LTR REVISION RECORD	CHK. S. KIKUCHI	APP. S. KUBOUCHI
K2 REVISED PER ECO-11-005033		NUMBER C-173981
RK HMR 2APR11		SCALE 5-1
DR CHK DATE		REV. K2
SHEET 1 OF 1		

CUSTOMER DRAWING