

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
HM	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	AC	REV PER ECO-15-007385	19MAY2015	GG	LS

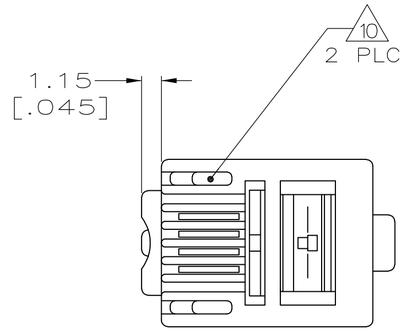

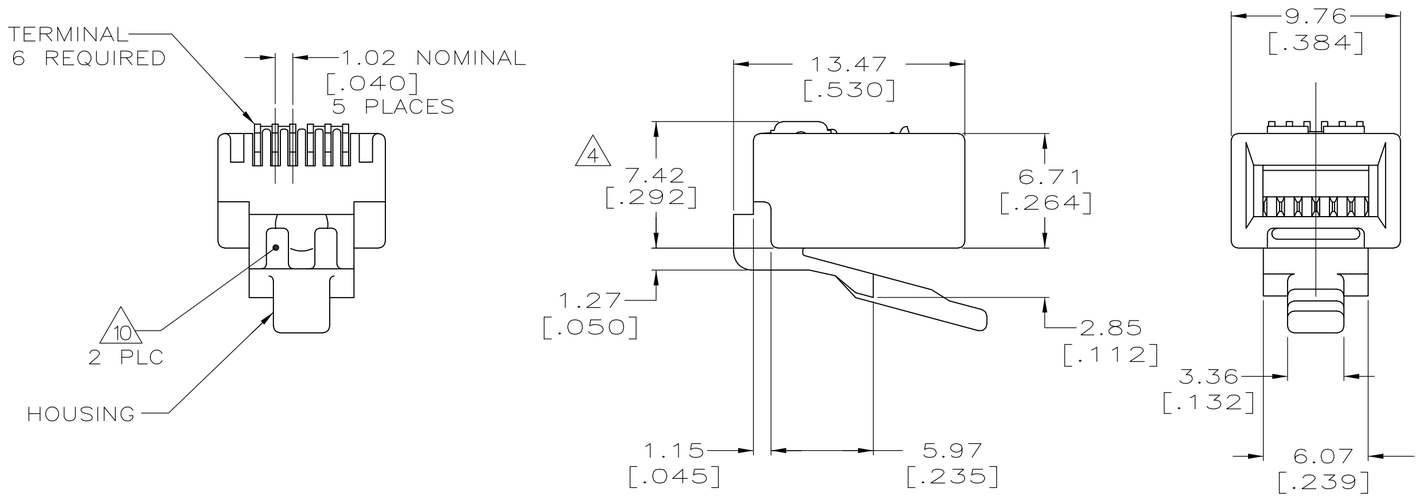

1. DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
2. MATERIAL: HOUSING—POLYCARBONATE,CLEAR. TERMINAL – .36 [.014] THICK PHOSPHOR BRONZE PLATED WITH .178μm[.000007] THICK GOLD IN LOCALIZED PLATE AREA, OVER .762 μm[.000030] THICK PALLADIUM NICKEL IN LOCALIZED PLATE AREA OVER 2.54μm[.000100] THICK NICKEL ON ENTIRE CONTACT.
3. PLUG WILL ACCEPT 26 OR 28 AWG STRANDED OR TINSEL WIRE HAVING AN INSULATION DIAMETER OF 0.89 – 0.99[.035 – .039] AND A MAXIMUM OVAL CABLE JACKET OF 2.29 × 6.61[.090 × .260].
4. TERMINATED DIMENSION 6.15[.242] MAXIMUM.
5. 10 ASSEMBLIES PER PACKAGE.
6. 10,000 ASSEMBLIES PER PACKAGE.
7. 1000 ASSEMBLIES PER PACKAGE.
8. 100 ASSEMBLIES PER PACKAGE.

PACKAGED	PART NO
REELED 10	641337-1
6	5-641337-1
7	5-641337-2
8	5-641337-3
5	6-641337-3

SUPERSEDED BY 5-641337-2

SUPERSEDED BY 5-641337-2

SUPERSEDED BY 5-641337-4

THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN YTP/UTA 9-3-93	TE Connectivity	
DIMENSIONS: mm [INCHES]	CHK C.WHITT 9-15-93	NAME MODULAR PLUG ASSEMBLY, 6 POSITION, LINE –	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± – 1 PLC ± – 2 PLC ± – 3 PLC ± – 4 PLC ± – ANGLES ± – (1)	APVD J.TONEY 9-20-93		
	PRODUCT SPEC 108-1163		
	APPLICATION SPEC 114-6016		
MATERIAL - (2)	FINISH - (2)	WEIGHT –	SIZE A2 · CAGE CODE 00779 · DRAWING NO C-641337 · RESTRICTED TO –
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1 · REV AC

641337